RIM-5


KENTECH CONTROLS LLC

REMOTE INDICATION MODULE

DESCRIPTION

The **RIM-5** is a five channel 24V Indication Module for use on its own or with a single RAM™ (optional audible alarm module) and multiple controls or alarm sensing devices. The **RIM-5** contains five LED lamps on a standard size wallplate. When an alarm is initiated by a contact closure feeding 24V to one of the channels of the **RIM-5**, the corresponding LED is illuminated, and the 24V signal is passed on to the RAM™ for an audible alarm. With a glance, the **RIM-5** allows the user to visually determine which alarm has been initiated.Safe class 2 wiring allows easy remote mounting from the control location.

The **RIM-5** is ideal for use with leak detection, temperature, pressure or humidity controls, in order to provide multiple point alarm systems. Up to five controls may be used with the **RIM-5**. A box next to each LED allows the user to label the application being monitored. Just write in a description with pen or marker and the user can quickly determine which area is in alarm when the LED is illuminated.

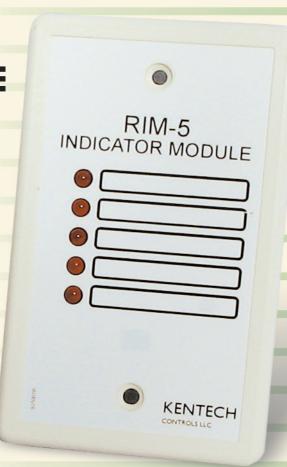

SPECIFICATIONS

Input:	5, 24V AC/DC +/-10%;1.5VA
Output:	24V Halfwave dc to RAM™
Operating Temperature:	-30º to 130ºF
Operating Humidity:	O-95%, non-condensing
RoHS Compliant	Made in USA



10 Partridge Lane, Huntington, NY 11743 Toll Free 877-7KENTECH • Phone/Fax 877-753-6832